

# fiber options

## OH-TX-12G-XXXX-LC Fiber SFP Data Sheet

### 12Gbit SDI Optical Transmitter - CWDM

- SDI multi-rate optical transmitter for 12G-SDI, 6G-SDI, 3G-SDI, HD-SDI signals
- Support for SMPTE 2082, SMPTE 2081, SMPTE 424M, SMPTE 292M
- 18 wavelength selections according to ITU-T G694.2
- For use with yellobrik and greenMachine
- Pluggable and hot swappable
- LC Connector - singlemode
- Lead free and RoHS compliant

The OH-TX-12G-XXXX-LC 12G SDI optical transmitter is a CWDM fiber plug in option for select LYNX Technik products. This SFP module facilitates the conversion of an electrical SDI signal into an optical signal for transmission over a fiber link. 18 wavelength selections are currently available for CWDM applications and provide support for distances up to 10km.\*\* The module supports 270Mbit / 1.485Gbit (1.5G) / 2.97Gbit (3G) / 5.94Gbit (6G) and 11.88Gbit (12G) SDI signals conforming to SMPTE 2082, SMPTE 424M, 292M.

A socket, or "cage" is provided for the SFP in the supporting LYNX Technik product for easy installation or upgrade. The SFP is hot swappable.

### Specifications


Parameter	Min	Typ	Max
Wavelengths [ 8 according to ITU-T G694.2 ]	$\lambda -10\text{nm}$	$\lambda$	$\lambda +10\text{nm}$
Optical Power	-2dBm	-	+3dBm
Distance	-	10km**	-
Data Rate (Mbps)	270		11880
Linear Extinction Ratio (dB)	3.5	-	-
Operating Temperature Range	5°C	-	40°C
Power Supply Voltage	3.1 VDC	3.3 VDC	3.5VDC
Power Consumption	-	135 mA	150 mA
Humidity (non condensing)	-	-	90%

$\lambda = [ 1270, 1290, 1310, 1330, 1350, 1370, 1390, 1410, 1430, 1450, 1470, 1490, 1510, 1530, 1550, 1570, 1590, 1610 ] \text{nm}$

### Mechanical

Parameter	
Size (not including connector - typ)	57mm x 13.4mm x 12.4mm
Weight	50g
SFP Connector pinning	MSA
Fiber connections	LC - singlemode

Country of manufacture: Taiwan

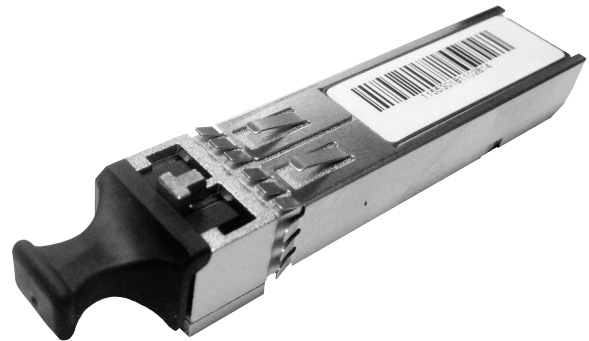

Shown with dust cap fitted

### Ordering Information

EAN / UPC	Model	Description
4250479325630	OH-TX-12G-1270-LC	12G SDI Fiber Transmitter CWDM - 1270nm
4250479325647	OH-TX-12G-1290-LC	12G SDI Fiber Transmitter CWDM - 1290nm
4250479325654	OH-TX-12G-1310-LC	12G SDI Fiber Transmitter CWDM - 1310nm
4250479325661	OH-TX-12G-1330-LC	12G SDI Fiber Transmitter CWDM - 1330nm
4250479327979	OH-TX-12G-1350-LC	12G SDI Fiber Transmitter CWDM - 1350nm
4250479327986	OH-TX-12G-1370-LC	12G SDI Fiber Transmitter CWDM - 1370nm
4250479327993	OH-TX-12G-1390-LC	12G SDI Fiber Transmitter CWDM - 1390nm
4250479328006	OH-TX-12G-1410-LC	12G SDI Fiber Transmitter CWDM - 1410nm
4250479328013	OH-TX-12G-1430-LC	12G SDI Fiber Transmitter CWDM - 1430nm
4250479328020	OH-TX-12G-1450-LC	12G SDI Fiber Transmitter CWDM - 1450nm
4250479328037	OH-TX-12G-1470-LC	12G SDI Fiber Transmitter CWDM - 1470nm
4250479328044	OH-TX-12G-1490-LC	12G SDI Fiber Transmitter CWDM - 1490nm
4250479328051	OH-TX-12G-1510-LC	12G SDI Fiber Transmitter CWDM - 1510nm
4250479328068	OH-TX-12G-1530-LC	12G SDI Fiber Transmitter CWDM - 1530nm
4250479325685	OH-TX-12G-1550-LC	12G SDI Fiber Transmitter CWDM - 1550nm
4250479325692	OH-TX-12G-1570-LC	12G SDI Fiber Transmitter CWDM - 1570nm
4250479325708	OH-TX-12G-1590-LC	12G SDI Fiber Transmitter CWDM - 1590nm
4250479325715	OH-TX-12G-1610-LC	12G SDI Fiber Transmitter CWDM - 1610nm

\*\* Distance is an approximation. Actual distances achieved can be longer or shorter depending on the type of fiber cable and accumulated optical losses in the fiber link. Determine link losses and perform optical budget calculations to ensure correct operation.

### WARNING

These SFP modules are Class 1 laser devices which comply to IEC825 and FDA 21 CFR 1040.10 and 1040.11. The device must be operated within specified temperature and voltage limits. The optical ports of the module must always be terminated with an optical connector or a dust plug (dust plug supplied)



Rev 1.4 Specifications subject to change

**LYNX**Technik **AG**

www.lynx-technik.com

**LYNX Technik AG**  
Brunnenweg 3  
D-64331 Weiterstadt  
Germany  
PH +49 (0) 6150 1817 0  
info@lynx-technik.com

**LYNX Technik Inc**  
26366 Ruether Ave.  
Santa Clarita, CA 91350  
USA  
PH +1 (661) 251 8600  
info@lynx-usa.com

**LYNX Technik Pte Ltd**  
114 Lavender street  
#05-92 CTHub2  
Singapore 338729  
PH +65 6702 5277  
infoasia@lynx-technik.com