

1x12G/4K & 4x3G Static HDR/SDR Converter



Description


The greenMachine HDR Static, 1 RU half 19" rackmount, is a real-time broadcast-quality HDR to SDR, SDR to HDR or cross-standards HDR to HDR converter with frame sync supporting formats up to 4K UHD (3840x2160). HDR Static applies color and contrast parameters equally throughout a specific piece of content, i.e. an average brightness/color range is determined across an entire program.

HDR Static greenMachine processor has an advanced algorithm that overcomes the issues arising from "round-tripping" SDR>HDR>SDR. The SDR signal at the production end and the distribution end of the round trip are visually identical making the whole SDR>HDR>SDR conversion process transparent. Supporting 4 x 3G or 1x 4K/UHD processing channel, HDR Static provides up, down and cross-conversions in HDR and SDR curves through appropriate static tone mapping.

It also supports **Wide Color Gamut (WCG)** needs of broadcasters, and professional AV live events requirement. HDR Static is most suitable for the environments outdoor/indoor where the light conditions does not change dynamically. For dynamically changing lighting conditions, check greenMachine HDR Evie.

Functions

- Frame Synchronizer
- 4K UHD / 3G Scaler
- Deinterlacer: 1x 4K mode and 4x deinterlacers (with motion adaptive filtering on the first two channels) in 4x3G
- Up to 20 user defined LUTs in 33-points .cube format
- DolbyE[®] Audio Embedding /De-embedding
- Basic Audio & Video Test Generator
- Audio Processing with gain adjustment, mute, inversion, and stereo to mono mix-down
- Two Dolby E[®] Decoder for decoding 8 audio channels 3 in a Dolby E[®] stream
- MADl input and output
- MetaData Management
- Video Adjustment include saturation, gain, black and hue adjustment
- Color correction
- Timing with available video and audio delay per channels is 30 frames and 1.3 seconds respectively
- Nova controller with full SNMP v2 support and custom control

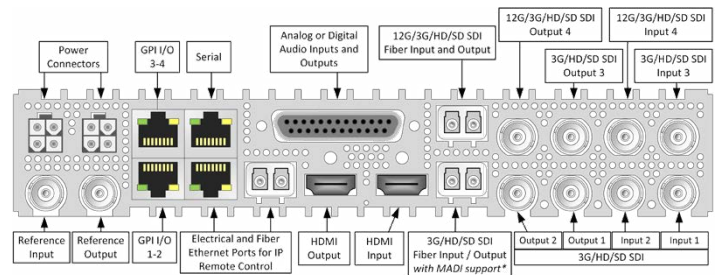

Technical Specifications

Static HDR ◀▶ SDR Conversion

HDR Transfer Characteristics PQ ST-2084, PQ BT-2100, HLG, Sony SLog3, Arri LogC, Red Log3G10, BMD Film, Panasonic V-Log, Canon C-Log2

SDR Transfer Characteristics Standard Dynamic Range (SDR)

Colorimetry Supported

HDR Colorimetry BT.2020, BT.709, Sony S-Gamut, ACES, DCI-P3, Panasonic V-Gamut, BMD Film, Canon Cinema Gamut, Arri Alexa, Red Wide Gamut

SDR Colorimetry W. 2020, BT. 709, Auto

Operation Modes

- 4k UHD single channel configuration
- 3G HD quad channel configuration

Color Processing

- RGB gain, lift, offset and gamma adjustments
- CMYW gain and offset adjustments

Input / Output Data Range

- Full range : Video signal representation (10bits) in full range of values from 0 to 1023 decimal (according to ITU BT 2100)
- Narrow range : Traditional video signal (10 bits) representation from 64 to 940 decimal values

This project (HA project no. 549/17-31) is financed with funds of LOEWE (Landes-Offensive zur Entwicklung Wissenschaftlich-ökonomischer Exzellenz) Förderlinie 3: KMU-Vorhaben

in cooperation with:




GMPT-HDR_Static_Rev4.1 Specifications subject to change




Functional Diagram

12G/4K UHD Single Channel Mode

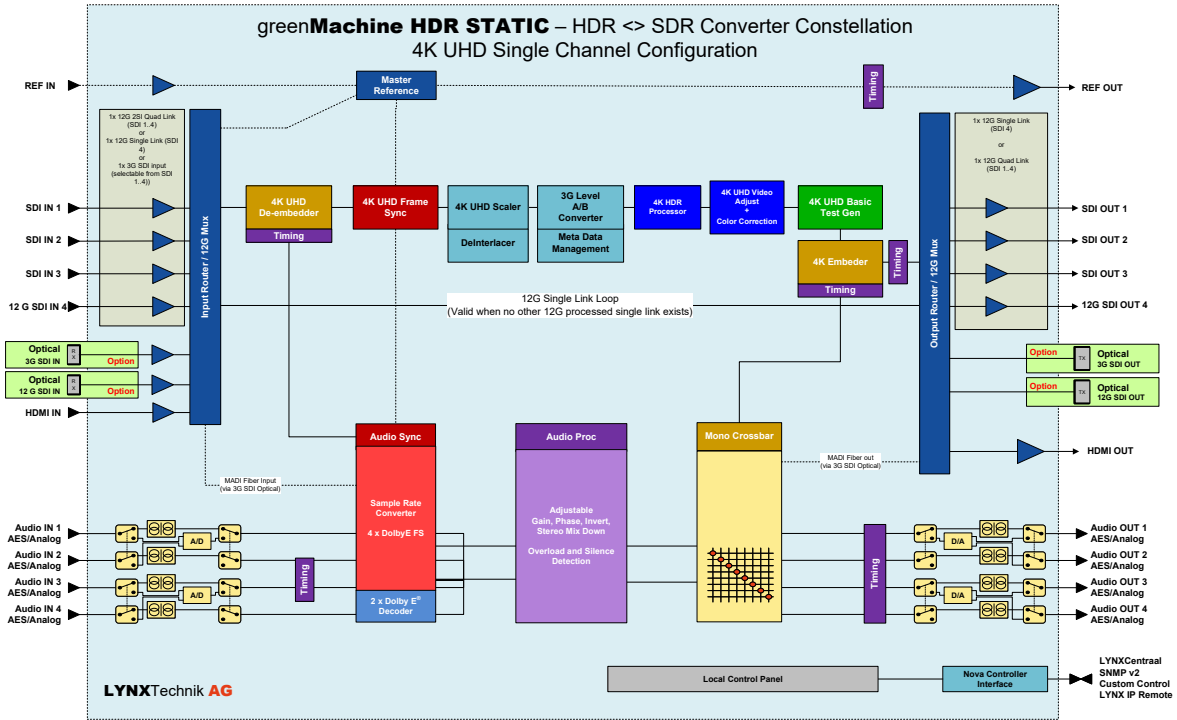


3G Quad Channel Mode

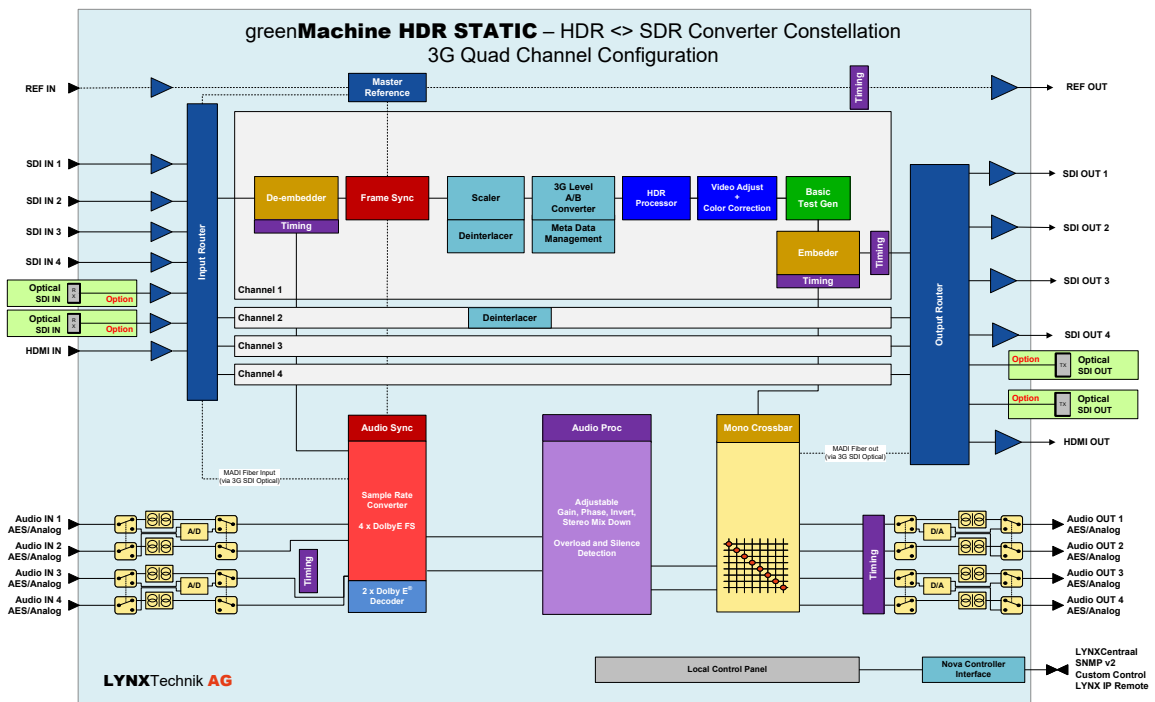


Example Applications

Example 1: Live outside broadcast with SDR Cameras (SDR ► HDR ► SDR roundtrip)

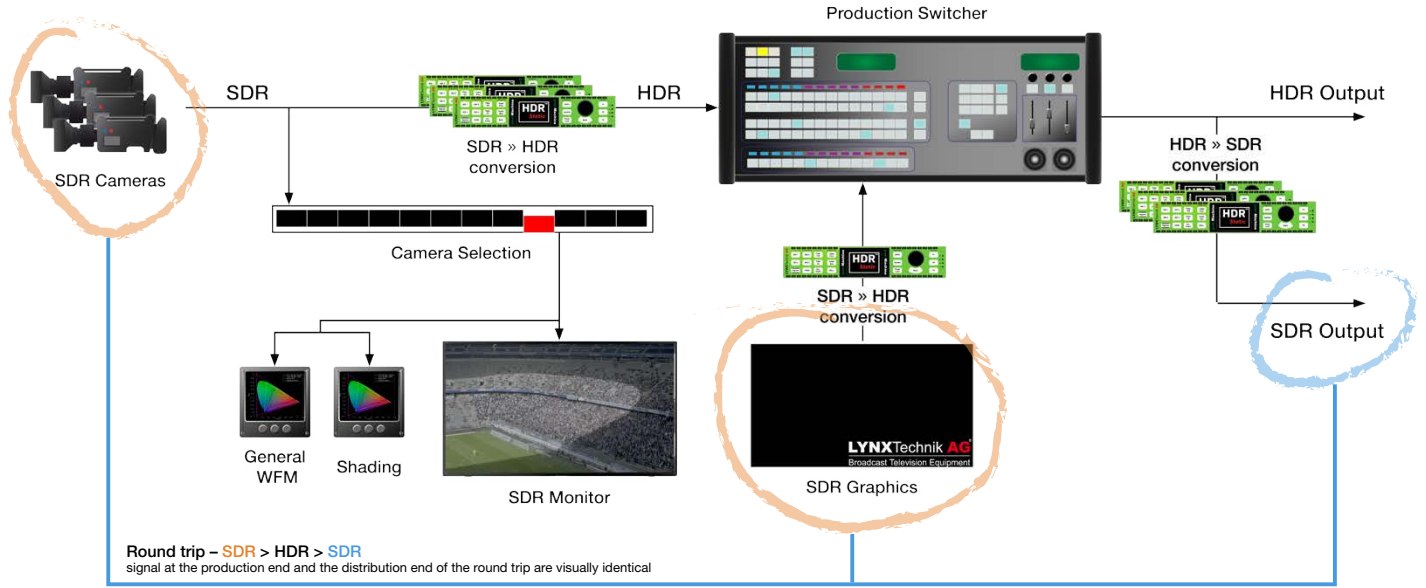

Example 2: Live outside broadcast with mixed HDR and SDR Cameras (SDR ► HDR ► SDR roundtrip)

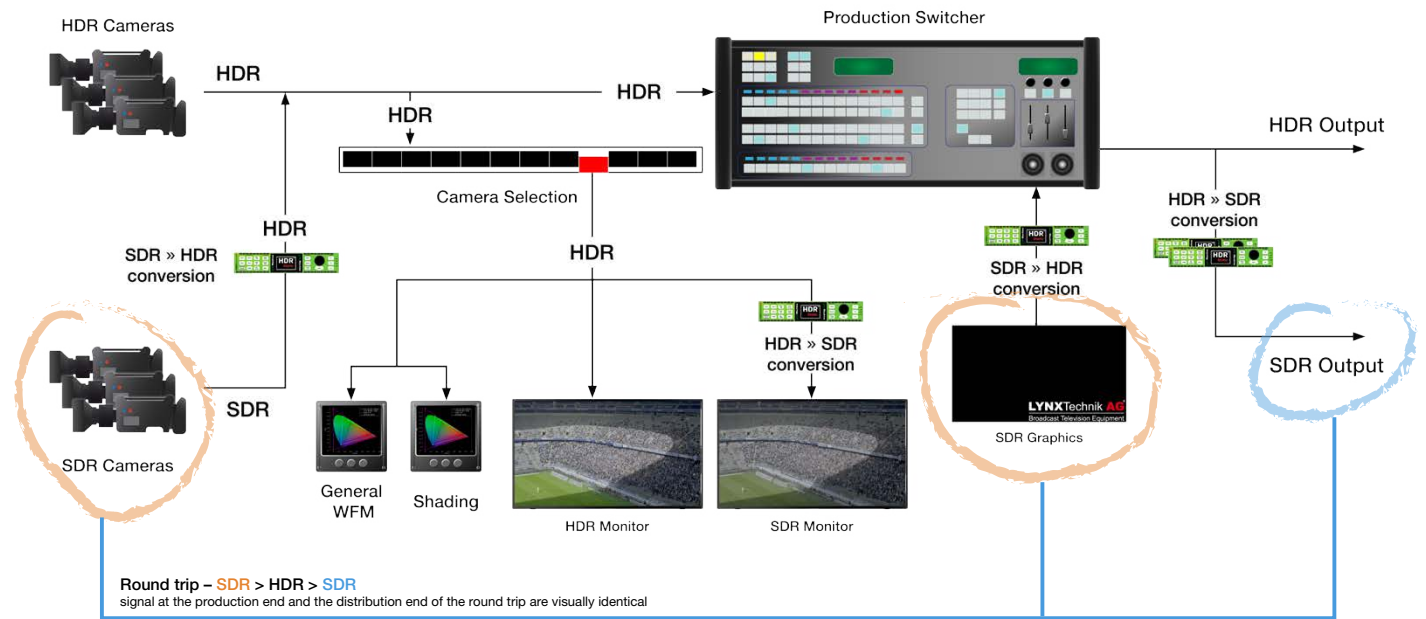

The roundtrip conversion via greenMachine HDR Static will provide the SDR image which is visually identical to the SDR camera image and SDR graphics, making it a transparent conversion process.



Hardware Specifications

BNC Connection

SDI Inputs	4x 3G SDI video on 75 Ohm BNC connector (SMPTE 259M, 292M, 424M) with automatic video format and standard detection
Return Loss:	>15dB from 5MHz to 1.5GHz, >10dB from 1.5GHz to 3GHz
Automatic cable EQ (Belden 1694A):	340m @ 270Mbit/s, 150m @ 1.5Gbit/s, 110m @ 3Gbit/s
12G SDI Input*	1x 12G SDI video on 75 Ohm BNC connector (SMPTE 259M, 292M, 424M, 2082) with automatic video format and standard detection
Return Loss:	>7dB to 6GHz; >4dB to 12GHz
SDI Output	4x SDI video on 75 Ohm BNC connector (SMPTE 259M, 292M, 424M)
Timing jitter:	< 0.2 UI @ 270Mbit/s, < 1.0 UI @ 1.5Gbit/s, < 2.0 UI @ 3Gbit/s
Alignment jitter:	< 0.2 UI @ 270Mbit/s, < 0.2 UI @ 1.5Gbit/s, < 0.3 UI @ 3Gbit/s
Return Loss:	>15dB from 5MHz to 1.5GHz, >10dB from 1.5GHz to 3GHz
12G SDI Output*	1x 12G SDI video on 75 Ohm BNC connector (SMPTE 259M, 292M, 424M, 2082)
Return Loss:	>7dB to 6GHz; >4dB to 12GHz
Reference Input	<ul style="list-style-type: none"> 1x analog video reference on 75 Ohm BNC connector Analog bi-level (SDTV) or tri-level (HDTV) auto detect
Reference Output	<ul style="list-style-type: none"> 1x analog video reference on 75 Ohm BNC connector Analog bi-level (SDTV) or tri-level (HDTV), cross lock capability

Audio Connection

Audio I/O	4x input and 4x output on Sub-D 25 female connector
Analog I/O	input impedance >10k Ohm Output Impedance 150 Ohm Analog I/O full scale level: selectable 12, 15, 18, 20, 22, 24 dBu

Technical Information

Power	12V DC @ 45W nominal (supports 7 - 24VDC input range) 2x power connections for redundant power supply
Mechanical	W: 218mm (1/2 19"), H: 44mm (1.75"), D: 225mm (8.86") - including connectors. Weight: 1.4kg (3.09lb)
Ambient	Temperature: 5°C to 40°C (41°F to 104°F) maintaining specification Humidity: 90% maximum, non-condensing

Supported SDI Formats

SDTV	525 / 59.94Hz 625 / 50Hz		
HDTV	1080i / 50Hz 1080i / 59.94Hz 1080i / 60Hz 1080p / 23.98Hz 1080p / 24Hz 1080p / 25Hz 1080p / 29.97Hz	1080p / 30Hz 1080psf / 23.98Hz 1080psf / 24Hz 1080psf / 25Hz 720p / 23.98 Hz 720p / 24Hz 720p / 25Hz	720p / 29.97Hz 720p / 30Hz 720p / 50Hz 720p / 59.94Hz 720p / 60Hz
3Gbit/s Level A	1080p / 50Hz 1080p / 59.94Hz 1080p / 60Hz		
12Gbit/s* Single Link	3840 x 2160p / 50Hz 3840 x 2160p / 59.94Hz 3840 x 2160p / 60Hz		
12Gbit/s* Quad Link 2SI Level A (4 x 3G)	3840 x 2160p / 50Hz 3840 x 2160p / 59.94Hz 3840 x 2160p / 60Hz		

***NOTE:** 12G SDI operations not supported on 3G constellations and constellation modes (i.e. 3G quad channel configuration)

Optical Connection (optional SFP required)

Optical SDI I/O	<ul style="list-style-type: none"> 1x 3G SDI SFP Transceiver (SMPTE 297M - 2006) 1x 12G SDI SFP Transceiver (SMPTE 292M, 424M, 2082) - no SD SDI (270Mbit)**
Optical Ethernet	IEEE 802.3z 1000Base-X Gbit/s Ethernet over Fiber at 1Gbit/s (125 MB/s)

****NOTE:** 12G SFPs can be used with 3G constellation and constellation modes, but only support 3G signals

AV Connection

HDMI	<ul style="list-style-type: none"> 1x Input 10 bit HDMI 1.4b 1x Output 10 bit HDMI 1.4b
Digital	AES3 balanced transformer isolated; Digital output level: 4V peak to peak nom
MADI	64 channel MADI supported on selected constellations (optional MADI SFP required for this)


Network Connection

Ethernet (LAN)	1x 10/100/1000 BaseT RJ45 Connector
GPI I/O	<ul style="list-style-type: none"> 4x general purpose inputs (RJ45 Connector) 4x general purpose outputs (RJ45 Connector)
Serial Data	EIA/ETA RS232C / RS422 / RS 485 (selectable through Lynx-Centraal) - RJ45 connector ESD protection for up to 16kV

Options: Rack Frames, Carry Case, and SFP Options

RFR 6000 - 1RU 19" Rack Mount Chassis

Rack mounting hardware which can accommodate one or two greenMachines in 1RU of rack space which also securely mounts the power supplies.
Note: Two power supplies can be mounted onto one RFR 6000. Please see more information in the RFR 6000 quick reference guide.

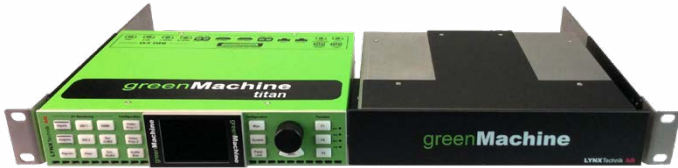

One greenMachine in Rack Mount

RXT 6001 19" Rack Extension for RFR 6000

The RXT 6001 is a compact and flexible rack extension for RFR 6000. It can be setup to hold up to four RPS A100 power supplies with optimized airflow surfaces.



RXT 6001 installed in RFR 6000

ABS Case for greenMachine

The transport case is perfect to keep your greenMachine, cables and documents organized and in one place, while also protecting it from environmental influences. With it's study design, our ABS Case is the ideal partner to transport your greenMachine whenever it is not wired in a rack, standalone or any other system you can think of.



SFP Fiber Options (12G variants also support 6G/3G/1.5G SDI)

12G SDI Video Fiber Transmitter		Power	
OH-TX-12G-LC	12G SDI Fiber TX SFP - LC - 10km* - 1310nm	-5dBm	
12G SDI Video Fiber Receiver		Sensitivity	
OH-RX-12G-LC	12G SDI Fiber RX SFP - LC - 10km* - 1270-1610nm	-10dBm (12G) -14dBm (6G/3G) -16dBm (1.5G)	
12G SDI Video Fiber Transceiver		Power	Sensitivity
OH-TR-12G-LC	12G SDI Fiber Transceiver, Singlemode - 10km* - LC - 1310nm	-5/+0.5 dBm	-10dBm (12G/6G) -14dBm (3G/1.5G)
CWDM SDI Video Transceiver (TR)		Power	Sensitivity
OH-TR-4-XXXX-LC XXXX = Wavelength	3G SDI Fiber Transceiver, Singlemode CWDM capable - 40km* - LC 18 wavelengths acc. to ITU T G692.2: 1270 - 1610nm.	-4 ... +2 dBm	-20dBm (3G/1.5G/SD)
OH-TR-12G-XXXX-LC XXXX = Wavelength	12G SDI Fiber Transceiver, Singlemode CWDM capable - 10km* - LC 18 wavelengths acc. to ITU T G692.2: 1270 - 1610nm.	-2/+3 dBm	-10dBm (12G/6G) -14dBm (3G/1.5G)

* Distance is an approximation. Actual distances achieved can be longer or shorter depending on the type of fiber cable and accumulated optical losses in the fiber link. Determine link losses and perform optical budget calculations to ensure correct operation.
More SFP options are available.

Ordering Information

greenMachine Package		
Includes	GM 6840:	greenMachine titan Processor Hardware
	RPS A100:	Primary Power Supplies with Region Specific Power Cord
	GMC-quad3G-FS	HDR<>SDR Converter Constellation License
GMPT HDRS (N/EU/US/UK)	1 x 12G / 4 x 3G Static HDR<>SDR converter(Hardware & License) Power plug Variants (please specify when ordering) GMPT HDRS N Power supply without Plug GMPT HDRS EU Power Supply with EU Plug GMPT HDRS US Power Supply with US Plug GMPT HDRS UK Power Supply with UK Plug	EAN: 4250479327863
License Only (no hardware included)		
GMC-HDR-STATIC-titan	greenMachine titan HDR Static constellation: 1 x 12G / 4 x 3G Static HDR to SDR converter	4250479326118
Accessories and Power Supply		
RFR 6000	1 RU 19" Rack Mount Chassis	4250479324466
RXT 6001	19" Rack Frame Extension for RFR 6000	4250479326507
RPS A100 (N/EU/US/UK)	AC to DC Desktop Power Supply Module 12V/8A (with None / EU / US / UK plug)	4250479327955

More broadcast applications:

- GMC-3GUPXD: 4 Channel 3G Up/Down/Cross Converter
- GMC-4KUPXD: 4K Up/Down/Cross Converter
- GMC-HDRvie+: Segmented, Dynamic HDR>SDR converter
- GMC-4FS: 4x3Gbit/s Frame Synchronizer
- GMC-BiDi-Transport: Bi-directional Transport

The greenMachine hardware can be configured for a different broadcast application by re-deploying a different application called "constellation". These perpetual licenses are and application deployment on the greenMachine.

For greenMachine the following regulatory and safety standards apply:

CE: EN 55103-1/1996, EN 55103-2/1996, EN 60950-1/2006
 Following the provisions of 2004/108/EC and 2006/95/EC directives.
FCC: This equipment has been tested and found to comply with the limits for a Class B digital device, pursuant to Part 15, Subpart B of the FCC Rules.

The RPS A100 power supply (EA11011D-1200) complies with the following safety standards:
UL/cUL 62368-1, TUV EN 62368-1, CB IEC 62368-1, FCC, CE, BSMI, PSE, RCM, IRAM



GMPT-HDR Static_Rev4.1 Specifications subject to change

